

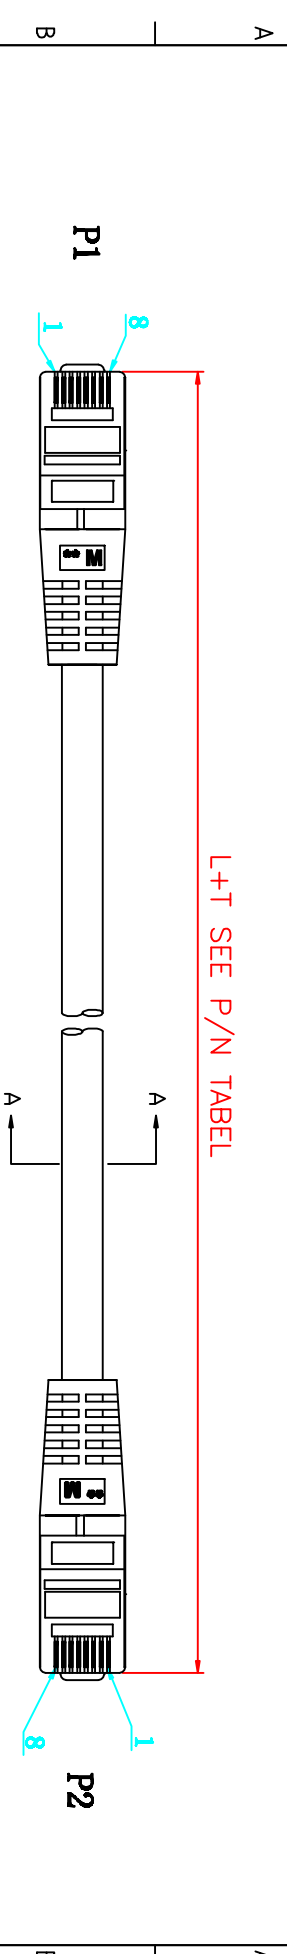


RevNo	Revision note	Date	Signature	Checked

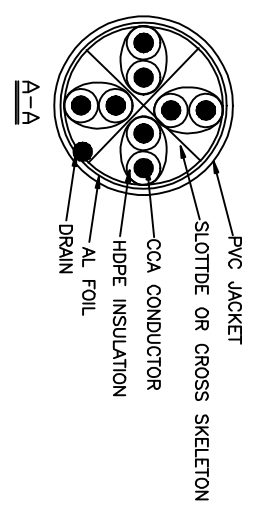

PIN OUT

P1 (568B) P2 (568B)

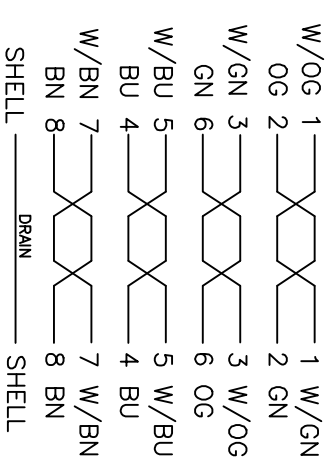

P/N:

LENGTH	TOLERANCE	GREY	RED
0.5M	±20MM	2012316	2015150
1M	±20MM	2012323	2013231
2M	±30MM	2012330	2013238
3M	±45MM	2012337	2013245
5M	±75MM	2012344	2013294
7M	±100MM	2012351	2016124
10M	±150MM	2012358	2013301
15M	±200MM	2012365	2015143
20M	±250MM	2012372	2015157
25M	±300MM	2012379	2015164

NOTES:

1:100% short,open and miss wire test.

3:CABLE MARKING:4PAIRS 26AWG FTP CAT6
Verified For Gigabit Ethernet RoHS COMPLIANT

4:RoHS compliant.

NO.	MATERIAL	DESCRIPTION	QTY.	UNIT
③	OUTER MOLDED 75A PVC,COLOR:RED		0,048	KG
②	CONNECTOR	FTP CAT6 8P8C,TRANSPARENT,PIN GOLD PLATED,COPPER NICKEL SHELL	2	PCS
①	CABLE	FTP CAT6,1P(7/0.16CCA)*4C+SLOTTDE OR CROSSSKELETON+AL+DRAIN, JACKET:PVC,OD:6.0±0.3MM.	L	M

Unit:MM	Quantity	Title/Name/designation/material/dimension etc	Article No./Reference
Designed by ACHY	Checked by HELEN	Approved by - date NOV 13 2014	File name FTP CAT6
ANGLE:			Date NOV 13 2014 Edition 1 Scale FREE Sheet 1/1
UNIT:MM	FTP CAT6	FTP CAT6 568B-568A	Sheet 1/1